



GENESIS™ PLATINUM

The Next Generation Heat Pump™

- Full Inverter Air to Water Pool Heat Pump
- Whisper quiet operation
- In Built WIFI control
- ISO9001, ISO14001, ISO18001



Sustainable Product Sustainable Project



Why Choose The Genesis™ Next Generation Heat Pump™





Genesis™ Next Generation Heat Pump™ operates with its unique Inverter technology exchanging heat in the surrounding air with the pool water through the continuous circulation of the R32 next generation refrigerant, that efficiently carries more heat and has a much lower environmental impact. Our inverter technology constantly measures the pools water temperature and adjusts the speed of the compressor and fan to run at the most efficient setting.

The working R32 medium is completely separated from the pool water and does not cause any secondary pollution, exchanging up to 50% more energy via the spiraled titanium exchanger. Coupled with our unique DC inverter technology, saving up to 50% on running costs, combined with our whisper quiet operation Genesis™ Next Generation Heat Pumps™ are increasingly loved and demanded by our customers.

At startup the Genesis™ Next Generation Heat Pump™ will slowly increase the compressor and fan speed as required, whilst at the same time automatically determine how much electrical energy is required to maintain the pools temperature. As the pool water temperature gets closer to the set point, the Genesis™ Next Generation Heat Pump™ will start reduce the speed of the compressor and fan, greatly reducing energy consumption.

Power Savings

The Genesis™ Next Generation Heat Pump™ has a coefficient of Performance (COP) of 22 (at air 26°C, Humidity 80%, Water 26°C), this means that for every 1kW of electricity consumed The Genesis™ Next Generation Heat Pump provides up to 22kw of Heat in return. Combine our Genesis™ Next Generation Heat Pump™ with a pool blanket and your roof top solar power for the perfect sustainable solution.

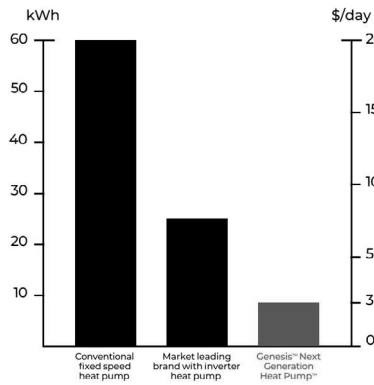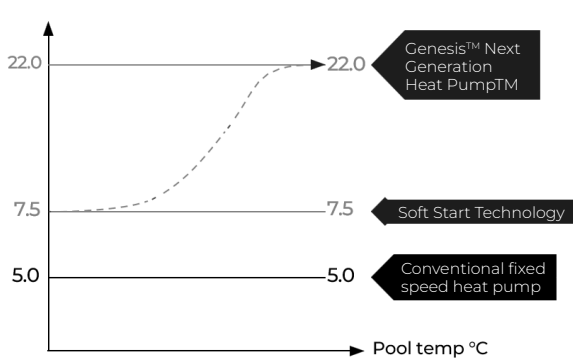


In build WIFI as Standard

The Genesis™ Next Generation Heat Pump™ has a smart design touchscreen controller and is easy to navigate, set pool temperatures and switch between heating and cooling modes as required. Download our SMARTLIFE APP for real time monitoring and full control anytime, anywhere (must have a full WIFI signal at Heat pump location).



Whisper Quiet Operation

The lower the sound decibels are the quieter the Genesis™ Next Generation Heat Pump™ will be while operating. The Genesis™ Next Generation Heat Pump™ can keep its operating level just above 40dB, so you can always enjoy a warm, comfortable swimming experience without being disturbed by a noisy pool heater.

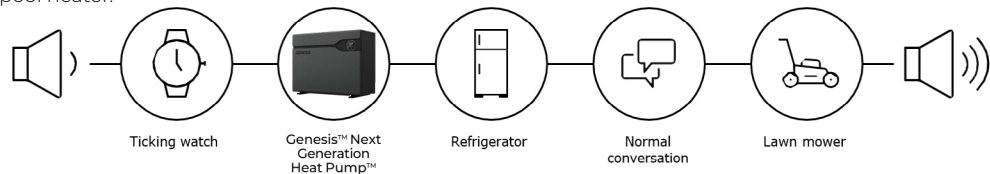

Other Benefits

The Genesis™ Next Generation Heat Pump™ has the latest technology advances:

- **Automatic defrost** built around a 4 way valve provides automatic defrosting and allows the unit to operate in temperatures as low as -15°C.
- **DC Fan Motor** housed in the Genesis™ Next Generation Heat Pump™ a brushless fan motor operates efficiently greatly reducing fan noise and failure rates compared to outdated mechanical brushed fan motors.
- **Heating and Cooling** modes are offered as a standard for the Genesis™ Next Generation Heat Pump™ giving you greater flexibility, ensuring your pool is at the perfect temperature
- **Corrosion Protection** on our condensing fins has the latest BLUEFINN hydrophilic coatings, reducing surface friction and enhance lubricity. Our Genesis™ Next Generation Heat Pump™ are made from a high quality anti corrosion powder coated aluminum casing protecting your heat pump for many years to come.
- **Warranty and Protection**
 - 30 Years on titanium Heat Exchanger
 - 10 Years on Compressor
 - 5 Years on all other components
 - CE Independent Certification on units

GENESIS™ PLATINUM

The Next Generation Heat Pump™

Genesis™ Platinum Discharge Specifications

| Model No. | GENP | GEN10kWp | GEN13kWp | GEN17kWp |
|--|-------------------|----------------|------------|------------|
| Refrigerant | / | R32 | | |
| Power Supply | / | 220-240V~/50Hz | | |
| Performance Condition: Air Temperature 27°C, Inlet Water Temperature 26°C, Humidity 80% | | | | |
| Heating Capacity | kW | 10.14 | 13.24 | 17.45 |
| COP | W/W | 22.30~7.35 | 22.00~7.27 | 22.33~7.39 |
| Performance Condition: Air Temperature 15°C, Inlet Water Temperature 26°C, Humidity 70% | | | | |
| Heating Capacity | kW | 7.50 | 9.86 | 12.97 |
| COP | W/W | 9.10~5.43 | 8.78~5.51 | 9.03~5.38 |
| Operating Air Temperature | °C | -20~43 | | |
| Rated Power Input at 15°C | kW | 0.20~1.38 | 0.27~1.79 | 0.33~2.41 |
| Rated Current | A | 7.10 | 9.46 | 12.01 |
| Advised Water Flow | m ³ /h | 3.0 | 4.0 | 5.5 |
| Water Pressure Drop | kPa | 10 | 13 | 16 |
| Water Proof Level | / | IPX4 | IPX4 | IPX4 |
| Sound Level (1m) | dB(A) | 32.8~41.8 | 33.6~42.3 | 36.0~43.4 |
| Sound Level (10m) | dB(A) | 12.8~21.8 | 13.6~22.3 | 16.0~23.4 |
| Water Connection | mm | 48.3 | | |

30
year
warranty

Titanium Heat
Exchanger

10
year
warranty

Compressor

5
year
warranty

All Other
Parts



| Model No. | GENP | GEN21kWp | GEN25kWp | GEN30kWp |
|--|-------------------|----------------|------------|------------|
| Refrigerant | / | R32 | | |
| Power Supply | / | 220-240V~/50Hz | | |
| Performance Condition: Air Temperature 27°C, Inlet Water Temperature 26°C, Humidity 80% | | | | |
| Heating Capacity | kW | 21.43 | 25.37 | 30.22 |
| COP | W/W | 22.09~7.31 | 22.17~7.29 | 22.29~7.48 |
| Performance Condition: Air Temperature 15°C, Inlet Water Temperature 26°C, Humidity 70% | | | | |
| Heating Capacity | kW | 15.88 | 17.51 | 22.08 |
| COP | W/W | 9.00~5.59 | 8.72~5.59 | 8.89~5.63 |
| Operating Air Temperature | °C | -20~43 | | |
| Rated Power Input at 15°C | kW | 0.40~2.84 | 0.43~3.13 | 0.57~3.92 |
| Rated Current | A | 14.75 | 18.47 | 20.16 |
| Advised Water Flow | m ³ /h | 6.5 | 8.0 | 9.0 |
| Water Pressure Drop | kPa | 20 | 35 | 35 |
| Water Proof Level | / | IPX4 | IPX4 | IPX4 |
| Sound Level (1m) | dB(A) | 36.9~45.1 | 37.9~47.0 | 38.7~47.9 |
| Sound Level (10m) | dB(A) | 16.9~25.1 | 17.9~27.0 | 18.7~27.9 |
| Water Connection | mm | 48.3 | | |



P (08) 9331 3868
E admin@greenstarsolutions.net.au
E service@greenstarsolutions.net.au
W www.greenstarsolutions.net.au

Follow Us!

